




FA 30 820 15

P. 1 | 2

gravity-s

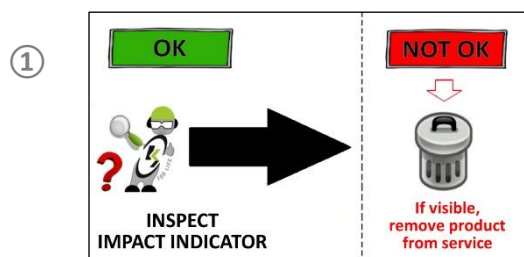









②



HS CODE
63079098
CARTON SIZE / PCS.
80 x 40 x 24 cm / 10
AET N°2777/10960-02/E01-01
Satra Technology Europe Ltd., N° 2777, Bracetown Business Park, Clonee, Dublin, D15YN2P, Ireland
MODULE D FI14/14003.02
SGS Fimko Oy, N°0598 Takomotie 8, 00380 HELSINKI, Finland



REF.	FA 30 820 15
LG. (MIN./MAX.)  KG	1.2 m / 1.5 m (connectors included) ----- Max. 140 KG
CE	EN 355:2002
MAT.	 30 mm  PES
	45 mm
	 FA 50 105 22B / FA 50 218 60
	YES
+	VG 11.063
	1.70 KG




**Largeur de l'absorbeur d'énergie**  
Width of the energy absorber  
**Ancho del absorbedor de energía**  
Larghezza del assorbitore di energia  
**Breite des Falldämpfers**

LG.



**Longueur Poids maxi utilisateur**  
**Length Max. user weight**  
**Longitud Peso máximo del usuario**  
**Lunghezza Peso Max. dell'utente**  
**Länge Höchstgewicht des Benutzers**



**Matière connecteur haut / connecteur bas**  
Material of top connector / bottom connector  
**Material conector alto / conector bajo**  
Materiale connettore alto / connettore basso  
**Material oberes / unteres Verbindungselement**



**Ouverture**  
Gate opening  
**Apertura**  
Apertura  
**Öffnung**



**Homologué pour le travail à proximité d'arêtes vives**  
Approved for work near sharp edges  
**Homologado para trabajo cerca de aristas vivas**  
Omologato per lavoro in prossimità di spigoli vivi  
**Zugelassen für Arbeiten in der Nähe scharfer Kanten**